


#### AASHTO DESIGN FACTORS

ALIGNMENT: curvilinear  
VERTICAL SIGHT DISTANCE: good for posted speed  
POSTED SPEED: 45 mph  
ROADSIDE HAZARDS: narrow shoulders in certain locations

#### MUTCD DESIGN FACTORS

LANE-USE CONTROL SIGNALS: none  
ADVANCED WARNING SIGNS: non-standard  
RESTRICTED LANE SIGNS: non-standard  
END OF HOVL SIGNS: non-standard  
DIAMOND SYMBOL: none  
HOVL DELINEATION: white skip marking

MOANALUA FREEWAY, HONOLULU, HAWAII  
FIGURE 5

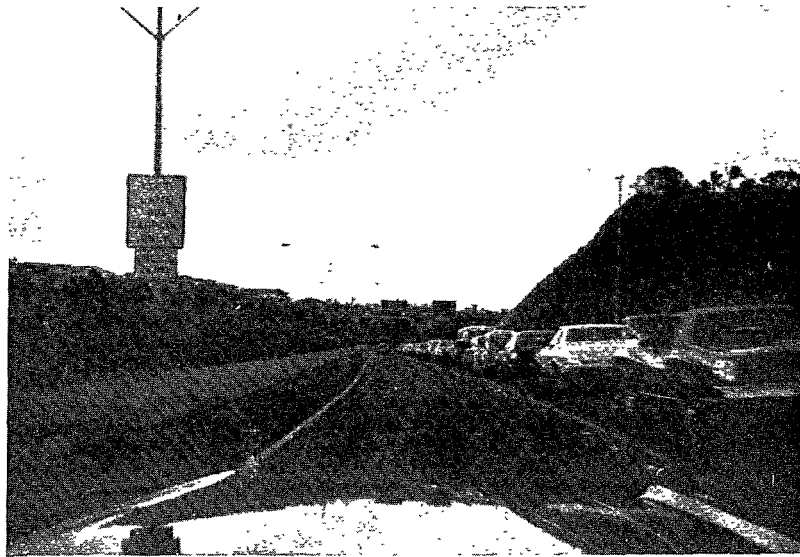

**MOANALUA FREEWAY, HONOLULU, HAWAII  
FIGURE 5 (CONT.)**